


Hybrid Assembly® 1/2" - 20 UNF

Flex

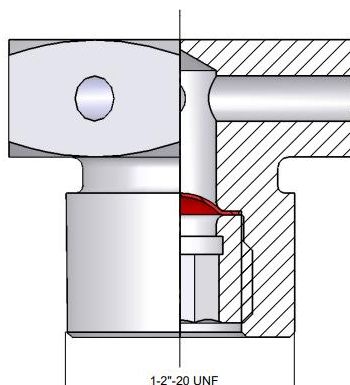

Thread:	1/2" - 20 UNF
Width across flats:	19 mm
Total length:	16,5 mm
Thread length:	8 mm
Nominal diameter DN:	4,0 mm
Sealing:	USIT-ring, O-ring, or metalseal (Cu, Al))
Body:	stainless steel 1.4404
Marking:	by laser
Bursting element options:	- nickel - stainless steel - Inconel
Bursting pressures:	40 – 1000 bar (basically) 40 – 196 bar (when used in Swagelok Rupture Disk Tee 1/4" NPT, Swagelok part-id SS-RTM4-F4-1)