


Hybrid System® G Standard

Shape similar to locking plug DIN 910 with additional thread for controlled deflation

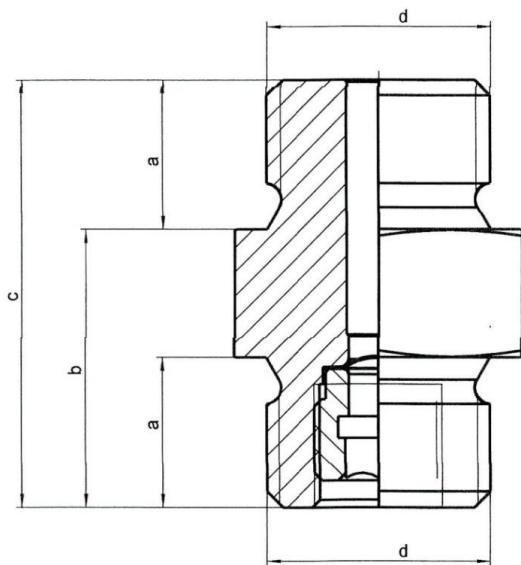

d	a	b	c	e	AF	DN	suitable for pressures
G 1/8"	8 mm	14 mm	22 mm	14 mm	14	min. 2,0 mm	40 - 1000 bar
G 1/4"	12 mm	20 mm	32 mm	18 mm	19	4,0 mm	30 - 1000 bar
G 3/8"	12 mm	20 mm	32 mm	22 mm	22	5,5 mm	10 - 1000 bar
G 1/2"	14 mm	26 mm	40 mm	26 mm	27	5,5 mm	10 - 1000 bar
G 3/4"	16 mm	28 mm	44 mm	32 mm	32	12,7 mm	3 - 500 bar
G 1"	16 mm	26 mm	42 mm	39 mm	40	12,7 mm	3 - 500 bar

Sealing: O-ring, USIT-ring or metal seal (Cu, Al)

Body: stainless steel 1.4404

Marking: by laser

Bursting element options: - nickel
- stainless steel
- Inconel

(depending on requirements and availability)