


Hybrid Assembly® G Standard

Form ähnlich Verschlussstopfen DIN 910

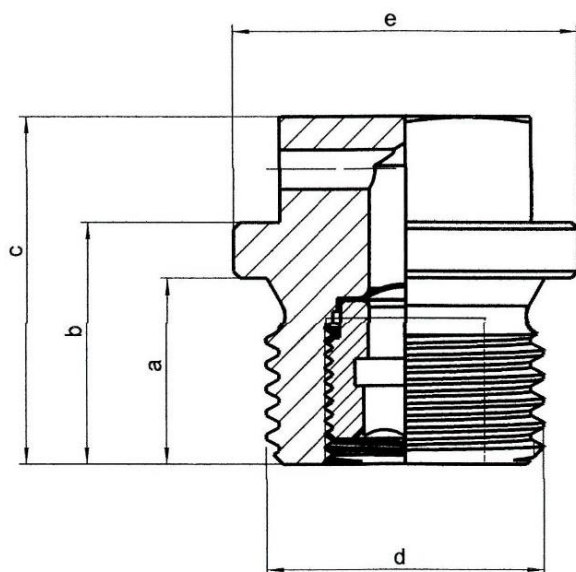

d	a	b	c	e	SW	DN	geeignet für Berstdrücke
G 1/8"	8 mm	11 mm	17,0 mm	14 mm	10	min. 2,0 mm	40 - 1000 bar
G 1/4"	12 mm	15 mm	20,8 mm	18 mm	13	4,0 mm	30 - 1000 bar
G 3/8"	12 mm	15 mm	20,8 mm	22 mm	17	5,5 mm	10 - 1000 bar
G 1/2"	14 mm	18 mm	26,2 mm	26 mm	19	5,5 mm	10 - 1000 bar
G 3/4"	16 mm	20 mm	29,8 mm	32 mm	24	12,7 mm	3 - 500 bar
G 1"	16 mm	21 mm	32,0 mm	39 mm	27	12,7 mm	3 - 500 bar

Abdichtung: O-Ring, USIT-Ring oder metallene Dichtung (Cu, Al)

Gehäuse: Edelstahl 1.4404
Kennzeichnung: per Laser

Berstelemente:

- Nickel
- Edelstahl
- Inconel

je nach Wunsch bzw. Verfügbarkeit